



CARE ORCHESTRA
Sartoria Acustica Italiana



Sartoria Acustica Italiana
CARE ORCHESTRA

Excellent Custom acoustics: Personalized products and solutions; Made in Italy for audiophiles, film lovers, designers and architects.

We interpret music in such a way that makes our products a masterpiece of excellence, a unique piece of design aesthetic and quality sound.

Discover our ability to propose perfect solutions for your aesthetic needs, with a wide range of custom made audio products and custom made furnitures combined with audio for interiors and exteriors.

- CARE ORCHESTRA

AUDIO

SPIRITUAL LINE

Line items sought with central, suitable for public demanding that the perception approaches pure sound, without exaggeration.

Designed for all custom finishes and suitable even for small spaces.



Small, accurate and amazing: Fullrange Bookshelf Speakers designed for a relaxed and frequent listening experience. For the people who care about Design.

The front reflex arrangement allows easy positioning in the home environment, even close to the walls and inside the bookstores.

Specifications

Speaker:	Zero Offset – 1 way – Bass Reflex
Nominal Impedance :	8 Ohm
Frequency Range: (+/- 3dB)	68 Hz – 18.000 Hz
Sensitivity:	85 dB, 1m, 2,83V
Woofer:	Long throw, high power loading design. Bamboo fiber paper cone with rubber surround. Die cast basket. Vented pole piece. Underhung design. Low 2nd, 3rd distortion design.
Peak Power:	80 W
Maximum input power (without distortions):	60 W
Spatial dispersion:	-3 dB a 30° from axis at 10.000Hz -12 dB a 60° from axis at 10.000Hz
Volume :	4,6 Liters
Binding Post:	“Banana” plug, cable up to 6 mmq
Dimensions:	170mm (L) x 240mm (H) x 235mm (W)

Structure

Structure Component Care Orchestra Multi Layer	Pyramid shaped polyurethane 30Kg / m3 Cork 6mm MDF
Frontal Panel	Front and back panels are not parallel and cuts CARE ORCHESTRA Asynchronous load
Internal Wiring	Van Den Hul, Copper OFC Silver Hullyflex, total cross section for single conductor 1.97 mm ² , resistance 0.88 Ohm / 100 meters

Finishing

Lacquering / Leather	Lacquering “Golden Light” Lacquering “Powder Light” Opaque Minted Lacquer Glossy Minted Lacquer RAL Lacquering Leather
Speaker Covers	Cuoietto Leather Leather Precious Leather

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 630 V / 400 V Tolerance: ± 5 %
Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%



SPIRITUAL WAVE TITANIUM EDITION



Wave evolved into Wave Titanium: Wave is a bookshelf bass reflex speaker, deep and ingenious. It is made to have a relaxing listen to the sound and frequency, pure and amazing.

The frontal reflex allows for an easy positioning of the domestic areas, also close to the internal walls of the library. The transducer made of titanium makes the sound more precise and clear. Also, the MULTICURVE technology allows volume adjustment for anyone to enjoy.

Specifications

Speaker:	Zero Offset - 1 way - Bass Reflex
Nominal Impedance:	8 Ohm
Frequency Range: (+/- 3dB)	DEEP Mode: 56 Hz - 19.000 Hz PURE Mode: 59 Hz - 21.000 Hz LIGHT Mode: 61 Hz - 23.000 Hz
Sensitivity:	85 dB, 1m, 2,83V
Woofer:	Full range frequency response. High power loading design. Die cast basket, titanium color painted, VC vented design. Titanium cone with Santoprene surround. Underhung motor design. Low 2nd, 3rd distortion design.
Peak Power:	80 W
Maximum input power (without distortions):	60W
Spatial dispersion:	-3 dB a 30° from axis at 10.000Hz -10 dB a 60° from axis at 10.000Hz
Volume :	4,6 Litri
Binding Post:	"Banana" Plug, cable up to 6 mmq
Dimensions:	170mm (L) x 240mm (H) x 235mm (W)

Structure

Structure Component Care Orchestra Multi Layer	Molded polyurethane foam with 30Kg / m3 pyramidal polyurethane cones Cork 6mm MDF
Frontal Panel	Front and back panels are not parallel and cuts CARE ORCHESTRA Asynchronous load
Internal Wiring	Van Den Hul, Copper OFC Silver Hullyflex, total cross section for single conductor 1.97 mm ² , resistance 0.88 Ohm / 100 meters

Finishing

Lacquering / Leather	Lacquering "Golden Light" Lacquering "Powder Light" Opaque Minted Lacquer Glossy Minted Lacquer RAL Lacquering Leather
Speaker Covers	Cuoietto Leather Leather Precious Leather

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 630 V / 400 V Tolerance: ± 5 %
Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%





Tide is a bookshelf bass reflex speaker, deep and ingenious. It is made to have a relaxing listen to the sound.

The frontal reflex allows for an easy positioning of the domestic areas, also close to the internal walls of the library. The transducer made of titanium makes the sound more precise and clear. Also, the MULTICURVE technology allows volume adjustment for anyone to enjoy.

Specifications

Speaker :	Zero Offset – 1 way – Bass Reflex
Nominal Impedance:	8 Ohm
Frequency Range: (+/- 3dB)	DEEP Mode: 46 Hz – 19.000 Hz PURE Mode: 49 Hz – 21.000 Hz LIGHT Mode: 51 Hz – 23.000 Hz
Sensibilità:	87 dB, 1m, 2,83V
Woofer:	Full Range Design, Underhung Motor Design With Ferrite Magnet, Very Low Thd (And Harmonic Distortion) 2nd And 3rd. Bamboo Fiber Paper Cone 120mm in Diametro
Peak Power :	80 W
Maximum input power (without distortions):	60W
Spatial dispersion:	-3 dB a 30° from axis at 10.000Hz -10 dB a 60° from axis at 10.000Hz
Volume :	15 Liters
Binding Post:	“Banana” Plug, cable up to 6 mmq
Dimensions:	253mm (L) x 360mm (H) x 322mm (W)

Structure

Structure Component Care Orchestra Multi Layer	Molded polyurethane foam with 30Kg / m3 pyramidal polyurethane cones Cork 6mm MDF
Frontal Panel	Front and back panels are not parallel and cuts CARE ORCHESTRA Asynchronous load
Internal Wiring	Van Den Hul, Copper OFC Silver Hullyflex, total cross section for single conductor 1.97 mm ² , resistance 0.88 Ohm / 100 meters

Finishing

Lacquering / Leather	Lacquering “Golden Light” Lacquering “Powder Light” Opaque Minted Lacquer Glossy Minted Lacquer RAL Lacquering Leather
Speaker Covers	Cuoietto Leather Leather Precious Leather

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 630 V / 400 V Tolerance: ± 5 %
Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%





Blue is a 2 way bass reflex floor standing speaker, highly engineered, characterized by deep acoustic. It is straightforward and precise for those who want a relaxing, frequent and pure listen. The speaker reaches a new level of performance, which allows for maximum efficiency even in places located close to the walls or in the areas not best suited for the acoustic.

Specifications

Speaker:	Zero Offset – 2 way – Hermispherical Bass Reflex
Nominal Impedance:	8 Ohm
Frequency Range:	41 Hz – 42.000 Hz
(+/- 3dB)	
Sensiivty:	88 dB, 1m, 2,83V
Woofer:	Seas Prestige -Woven polypropylene internal damping. Bullet shaped phase plug reduces compression. Stiff and stable injection moulded metal basket, keeps the critical components in perfect alignment.
Tweeter :	Scan Speak -Extended Frequency to above 40KHz. Very Low Resonance Frequency - 500Hz. Dual Ring Radiator and textile diaphragm.
Crossover Filter:	2° Cutting frequencies: 2900 Hz
Peak Power:	250 W
Spatial dispersion:	-4 dB a 30° from axis at 10.000 Hz -13 dB a 60° from axis at 10.000 Hz
Volume :	20,4 Liters
Biniding Post:	“Banana”, cable up to 6 mmq
Dimensions:	235mm (L) x 934mm (H) x 286mm (W)

Structure

Structure Component	Pyramid shaped polyurethane 30Kg / m3
Care Orchestra Multi Layer	Cork 6mm MDF
Frontal Panel	Front and back panels that are not parallel and cuts CARE ORCHESTRA Asynchronous load
Internal Wiring	Van Den Hul, Copper OFC Silver Hullyflex, total section for single conductor 1.97 mm ² , resistance 0.88 Ohm / 100 meters. Resistance 20 ° C / 68 ° F, 0.58 Ohm / 100 m

Finishing

Lacquering / Leather	Lacquering “Golden Light” Lacquering “Powder Light” Opaque Minted Lacquer Glossy Minted Lacquer RAL Lacquering Leather
Speaker Covers	Cuoietto Leather Leather Precious Leather

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 630 V / 400 V Tolerance: ± 5 %
Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%





Violet is a 2 way bass floor standing speaker, highly engineered, characterized by a deep acoustic, straightforward and precise for those who frequently want a relaxing and pure sound. Together, the 2 woofers support the description of a precise and defined scene with low presence and perfect balance.

Specifications

Speaker:	2 Way, Hemispherical Bass Reflex
Nominal Impedance:	4 Ohm
Frequency Range: (+/- 3dB)	37 Hz - 42.000 Hz
Sensiivity:	90 dB, 1m, 2,83V
Woofer:	Seas Prestige -Woven polypropylene internal damping. Bullet shaped phase plug reduces compression. Stiff and stable injection moulded metal basket, keeps the critical components in perfect alignment.
Tweeter :	Scan Speak -Extended Frequency to above 40KHz. Very Low Resonance Frequency - 500Hz. Dual Ring Radiator and textile diaphragm.
Crossover Filter:	1° and 2° Electric Order Cut-off frequency: 3860 Hz
Peak Power:	300 W
Maximum input power (without distortions):	140 W
Spatial dispersion:	-3 dB a 30° from axis at 10.000 Hz -12 dB a 60° from axis at 10.000 Hz
Volume :	32 Liters
Biniding Post:	"Banana", cable up to 8 mmq
Dimensions:	230 mm (L) x 1000 mm (H) x 330 mm (W)

Structure

Structure Component	Expanded Polyurethane with 3 cm cones - 30Kg/m3
Care Orchestra Multi Layer	Cork 6mm MDF Fir
Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response
Internal Wiring	Van Den Hul Unipolar Copper OFC Silver Hullyflex 3.3 mmq (157 wires) 300V. Resistance 20 ° C / 68 ° F, 0.58 Ohm / 100 m

Finishing

Lacquering / Leather	Lacquering "Golden Light" Lacquering "Powder Light" RAL Lacquering Leather
Speaker Covers	Cuoietto Leather Leather Precious Leather

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 630 V / 400 V Tolerance: ± 5 %
Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%





Black is a 3-way bass reflex, floor-standing speaker. It is the highest acoustic engineering applied to the Spiritual series with deep bass, linearity, acoustic scene in a compact speaker perfect in any position.

Specifications

Speaker:	3 Way, Hemispherical Bass Reflex
Nominal Impedance:	4 Ohm
Frequency Range: (+/- 3dB)	36 Hz – 42.000 Hz
Sensiivity:	91 dB, 1m, 2,83V
Woofer:	Seas Prestige – membrane is of treated polypropylene fabric, extraordinary damping, aluminum basket obtained by injection, unique reinforced rubber edge.
Tweeter :	Scan Speak Discovery – 25mm soft double concentric wave membrane with phase corrector, ferrite magnet.
MidRange:	Seas Prestige - membrane in treated polypropylene fabric, very low distortion, very high performance on the medium frequencies.
Crossover Filter:	1° and 2° Electric Orders
Peak Power:	340 W
Maximum input power (without distortions)	: 170 W
Spatial dispersion:	-3 dB a 30° from axis at 10.000 Hz -12 dB a 60° rom axis at 10.000 Hz
Volume :	36 Liters
Biniding Post:	“Banana”, cable up to 8 mmq
Dimensions:	235 mm (L) x 1094 mm (H) x 330 mm (W)

Structure

Structure Component	Expanded Polyurethane with 3 cm Care Orchestra Multi Layer
	Cork 6mm MDF Fir
Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response
Internal Wiring	Van Den Hul Unipolar Copper OFC Silver Hullyflex 3.3 mmq (157 wires) 300V. Resistance 20 ° C / 68 ° F, 0.58 Ohm / 100 m

Finishing

Lacquering / Leather	Lacquering “Golden Light” Lacquering “Powder Light” RAL Lacquering Leather
Speaker Covers	Cuoietto Leather Leather Precious Leather

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 630 V / 400 V Tolerance: ± 5 %
Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%



CELESTIAL LINE

Refined and powerful audio performance for hi fi systems and home cinema solutions.

Balanced and present, they are a suitable solution for every need, customizable in every detail both aesthetic and technical.



Rose is a bookshelf bass reflex full range speaker. It is designed for creating a wide three dimensional scene, maintaining the balance of fantastic listen.

It is also easily positioned in the home environment, even close to the walls and inside the bookstores. Ideal for HI FI and Home Cinema System

Specifications

Speaker:	Zero Offset - 2 Vie - Bass Reflex
Nominal Impedance:	8 Ohm
Frequency Range: (+/- 3dB)	56 Hz - 34.000 Hz
Sensiivity:	84,5 dB, 1m, 2,83V
Woofers:	Seas Prestige - Cone is of treated paper, 120mm diameter and has large motor system
Tweeter :	Vifa - Peerless Platinum - Fabric dome, neodymium magnet
Peak Power:	200 W
Maximum input power (without distortions):	60W
Crossover Filter:	second electric order Cutting frequency: 2900 Hz
Spatial dispersion:	-3 dB a 30° from axis at 10.000 Hz -8 dB a 60° from axis at 10.000 Hz
Volume :	4,8 Liters
Biniding Post:	"Banana" connectors, forks and unsheathed cable up to 6mm diameter
Dimensions:	170mm (L) x 240mm (H) x 280mm (W)

Structure

Structure Component Care Orchestra Multi Layer	Pyramid shaped polyurethane 30Kg / m3 MDF Larch
Frontal Panel	CARE ORCHESTRA Asymmetrical response
Internal Wiring	Van Den Hul, Copper OFC Silver Hullyflex, total cross section for single conductor 1.97 mm ² , resistance 0.88 Ohm / 100 meters

Finishing

Lacquering / Leather	Lacquering "Golden Light" Lacquering "Powder Light" Opaque Minted Lacquer Glossy Minted Lacquer RAL Lacquering Leather
Speaker Covers	Cuoietto Leather Leather Precious Leather

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 630 V / 400 V Tolerance: ± 5 %
Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%





Deep Breath is two way Bass Reflex Speakers, featuring deep and precise bass, great dynamics, clear and present voices. Perfect for medium sized environments, they are characterized by a clean design and are well suited to all décor styles.

Specifications

Speaker:	2 way Bass Reflex
Nominal Impedance:	4 Ohm
Frequency Range:	48 Hz - 40.000 Hz (+/- 3dB)
Sensiivity:	91,5 dB, 1m, 2,83V
Woofer:	Scan-Speak Discovery - 180 mm diameter glass fiber cone, magnetic system with aluminum ring
Tweeter :	Scan-Speak Discovery - Dome tweeter with fabric membrane with very low distortion
Peak Power:	180 W
Maximum input power (without distortions):	60W
Crossover Filter:	2° electric order Cutting frequency: 1900 Hz
Spatial dispersion:	-2 dB at 30 ° with respect to the axis, at 10,000 Hz -10 dB a 60° with respect to the axis, at 10.000 Hz
Volume :	15 Liters
Biniding Post:	Banana connectors Cable unsheathed up to 8mm in diameter.
Dimensions:	247 mm (L) x 351 mm (H) x 325 mm (W)
Weight:	22 Kg (a couple)

Structure

Structure Component	Expanded Polyurethane with 3 cm cones - 30Kg/m ³ Cork 6mm MDF Fir
Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response
Internal Wiring	Van Den Hul Copper OFC Silver Hullyflex 3,3 mmq (157 wires) 300V Resistance 20 ° C / 68 ° F, 0.58 Ohm / 100 m

Finishing

Lacquering / Leather	Lacquering "Golden Light" Lacquering "Powder Light" Opaque Minted Lacquer Glossy Minted Lacquer RAL Lacquering Leather
Speaker Covers	Cuoietto Leather Leather Precious Leather

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 630 V / 400 V Tolerance: ± 5 %
Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%



CELESTIAL DEEP BREATH DUETTO EDITION



Born as a limited edition, but has become the new benchmark; Deep Breath Duetto is a 2 way bi-wiring Bass Reflex free standing speaker with extreme performance sacred to the audiophiles; who are amazed by the new front of music, without giving up on a modern design and are custom made.

Specifications

Speaker:	2 way Bass Reflex
Nominal Impedance:	4 Ohm
Frequency Range: (+/- 3dB)	46 Hz – 40.000 Hz
Sensiivity:	91,5 dB, 1m, 2,83V
Woofer:	Scan-Speak Discovery – 180 mm diameter glass fiber cone, magnetic system with aluminum ring
Tweeter :	Scan-Speak Discovery – Dome tweeter with fabric membrane with very low distortion
Peak Power:	180 W
Maximum input power (without distortions):	60W
Crossover Filter:	2° electric order Cutting frequency: 1900 Hz
Spatial dispersion:	-2 dB at 30 ° with respect to the axis, at 10,000 Hz -10 dB a 60° with respect to the axis, at 10.000 Hz
Volume :	15 Liters
Biniding Post:	Banana connectors Cable unsheathed up to 8mm in diameter.
Dimensions:	247 mm (L) x 351 mm (H) x 325 mm (W)
Weight:	22 Kg (a couple)

Structure

Structure Component	Expanded Polyurethane with 3 cm cones - 30Kg/m ³ Cork 6mm MDF Fir
Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response
Internal Wiring	Van Den Hul Copper OFC Silver Hullyflex 3,3 mmq (157 wires) 300V Resistance 20 ° C / 68 ° F, 0.58 Ohm / 100 m

Finishing

Lacquering / Leather	Lacquering “Golden Light” Lacquering “Powder Light” Opaque Minted Lacquer Glossy Minted Lacquer RAL Lacquering Leather
Speaker Covers	Cuoietto Leather Leather Precious Leather

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 630 V / 400 V Tolerance: ± 5 %
Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%





Born in the shadows of the cathedral spiers from which it gets its name. Cathedral is a floorstanding 3 way tuned bass reflex speaker, powerful, current and with unique performance.

It is suitable for large and airy areas in which its low, deep and vibrant qualities give the best listening experience.

Specifications

Speaker:	3 vie Bass Reflex
Nominal Impedance:	4 Ohm
Frequency Range:	24 Hz – 40.000 Hz
(+/- 3dB)	
Sensiivty:	92,5 dB, 1m, 2,83V
Woofer:	Scan-Speak Discovery – 220mm Fibre Glass Cone & dust cap, High sensitivity, Long Linear excursion, Diecast Aluminium basket, Vents below spider, Low damping rubber edge.
Midrange:	Scan-Speak Discovery – Aluminium Chassis, 150mm Fibreglass Cone, Phase plug, Coated foam edge with low distortion.
Tweeter:	Scan-Speak Discovery – Soft-dome, textile membrane, Low Distorsion
Peak Power:	280 W
Maximum input power (without distortions):	170 W
Crossover Filter:	2° electric order Cut frequency: 780 Hz, 2970 Hz
Spatial dispersion:	-2 dB at 30° from axis at 10.000 Hz -10 dB at 60° from axis at 10.000 Hz
Volume :	86 Liters, 8 Liters
Biniding Post:	"Banana" & "fork" shaped connectors, and unsheathed cable up to 6mm diameter
Dimensions:	347 mm (L) x 1211 mm (H) x 485 mm (W)

Structure

Structure Component	Expanded Polyurethane with 3 cm cones - 30Kg/m3
Care Orchestra Multi Layer	Cork 6mm MDF ultra high density Fir
Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response
Internal Wiring	Van Den Hul Copper OFC Silver Hullyflex 3.3 mmq (157 wires) 300V Resistance 20 ° C / 68 ° F, 0.58 Ohm / 100 m

Finishing

Lacquering / Leather	Lacquering "Golden Light" Lacquering "Powder Light" Opaque Minted Lacquer Glossy Minted Lacquer RAL Lacquering Leather
Speaker Covers	Cuoietto Leather Leather Precious Leather

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 630 V / 400 V Tolerance: ± 5 %
Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%



DIVINA LINE

Ultra high end components for the best loudspeakers; excellent sound, small in size, the components of vanguard, refined and custom finishes in every detail come together in a blend of excellence, the birth of a divine gift to the masters.



Minor is a compact 2-way bass reflex speaker, free standing, that embodies the design and style excellence of Care Orchestra.

It is suitable for those who do not have much space, but still want the best. Minor is a speaker designed with the maximum ratio between performance and size.

Specifcation

Speaker:	2 way, Bass Reflex
Nominal Impedance:	8 Ohm
Frequency Range:	57 Hz – 40.000 Hz
(+/- 3dB)	
Sensiivity:	85,5 dB, 1m, 2,83V
Woofer:	Seas Excel – Paper cone with Nextel cover, 120 mm diameter
Tweeter :	Scan-Speak Illuminator – Soft dome, neodymium ring magnet
Peak Power:	200 W
Maximum input power (without distortions):	70 W
Crossover Filter:	2° electric order
	Cutting frequency: 2100 Hz
Spatial dispersion:	-2 dB a 30° with respect to the axis, at 10,000 Hz
	-5 dB a 60° with respect to the axis, at 10.000 Hz
Volume :	4 Liters
Biniding Post:	"Banana" & "fork" shaped connectors, and unsheathed cable up to 6mm diameter
Dimensions:	176 mm (L) x 238 mm (H) x 223 mm (W)
Weight:	16 Kg (a couple)

Structure

Structure Component	Expanded Polyurethane with 3 cm
Care Orchestra Multi Layer	cones - 30Kg/m3
	Cork 6mm
	MDF
	Fir
Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response
Internal Wiring	Van Den Hul Copper OFC Silver Hullyflex 3.3 mmq (157 wires) 300V
	Resistance 20 ° C / 68 ° F, 0.58 Ohm / 100 m

Finishing

Lacquering / Leather	Lacquering “Golden Light” Lacquering “Powder Light” Opaque Minted Lacquer Glossy Minted Lacquer RAL Lacquering Leather
----------------------	--

Speaker Covers	Cuoietto Leather Leather Precious Leather
----------------	---

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast
	Voltage: 800 V / 1200 V Voltage: 630 V / 400 V
	Tolerance: ± 2 % Tolerance: ± 5 %
Resistors	Resistance to metal oxide
	Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance
	Conductor OFC 99.99%





Minor Duet Edition is an evolution of a specie with 2 way speaker, bass reflex, bi-wiring used for support. The 4 liters consists of the best technology, design and finishes which makes it a unique product of Care Orchestra.

It is essential for those who want to challenge the laws of physics and acoustics.

Specifications

Speaker:	2 way, Bass Reflex
Nominal Impedance:	8 Ohm
Frequency Range:	56 Hz – 40.000 Hz (+/- 3dB)
Sensiivity:	85 dB, 1m, 2,83V
Woofer:	Seas Excel – Paper cone with Nextel cover, 120 mm diameter
Tweeter :	Scan-Speak Illuminator – Soft dome, neodymium ring magnet
Peak Power:	200 W
Maximum input power (without distortions):	70 W
Crossover Filter:	2° electric order Cutting frequency: 2100 Hz
Spatial dispersion:	-2 dB a 30° with respect to the axis, at 10,000 Hz -5 dB a 60° with respect to the axis, at 10.000 Hz
Volume :	4 Liters
Biniding Post:	"Banana" & "fork" shaped connectors, and unsheathed cable up to 6mm diameter
Dimensions:	176 mm (L) x 238 mm (H) x 223 mm (W)
Weight:	16 Kg (a couple)

Structure

Structure Component	Expanded Polyurethane with 3 cm cones - 30Kg/m3 Cork 6mm MDF Fir
Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response
Internal Wiring	Van Den Hul Copper OFC Silver Hullyflex 3,3 mmq (157 wires) 300V Resistance 20 ° C / 68 ° F, 0,58 Ohm / 100 m

Finishing

Lacquering / Leather	Lacquering "Golden Light" Lacquering "Powder Light" Opaque Minted Lacquer Glossy Minted Lacquer RAL Lacquering Leather
Speaker Covers	Cuoietto Leather Leather Precious Leather

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 800 V / 1200 V Voltage: 630 V / 400 V Tolerance: ± 2 % Tolerance: ± 5 %
Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%





A 3-way bass reflex floorstanding speaker, characterized by an absolute, crystal clear, precise and reliable reproduction of the sound which can reproduce a three-dimensional sound stage is astounding realism and dynamics.

Specifications

Speaker:	3 way Bass Reflex
Nominal Impedance:	4 Ohm
Frequency Range: (+/- 3dB)	36 Hz – 38.000 Hz
Sensiivty:	90 dB, 1m, 2,83V
Woofer:	Scan-Speak Revelator – Paper cone 180mm in diameter, Low-Loss linear suspension with ferrite magnet.
Midrange:	Scan-Speak Illuminator– 1 piece cone 120mm in diameter, Neodymium magnet, Low-Loss Linear suspension, Very Wide Frequency Response.
Tweeter:	Scan-Speak Illuminator – Textile Dome Diaphragm, 6 Neo magnets
Peak Power:	260 W
Maximum input power (without distortions):	150W
Crossover Filter:	2° electric order Cutting frequency: 400 Hz, 2900 Hz
Spatial dispersion::	-2 dB a 30° with respect to the axis, at 10,000 Hz -6 dB a 60° with respect to the axis, at 10.000 Hz
Volume :	39 Liters / 10 Liters
Biniding Post:	"Banana" & "fork" shaped connectors, and unsheathed cable up to 6mm diameter
Dimensions:	354 mm (L) x 1147 mm (H) x 358 mm (W)
Weight:	70 Kg (a couple)

Structure

Structure Component Care Orchestra Multi Layer	Expanded polyurethane foam with 5cm cones of 30Kg / m ³ Expanded polyurethane foam with 3cm cones of 30Kg / m ³ Lana minerale natuarle Cork 6mm MDF ultra high density Fir
--	--

Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response. Front and back panels not parallel, cuts CARE ORCHESTRA Asynchronous load. As well as top and bottom panels.
---------------	--

Internal Wiring	Van Den Hul Unipolar Copper OFC Silver Hullyflex 3.3 mmq (157 wires) 300V Resistance 20 ° C / 68 ° F, 0.58 Ohm / 100 m
-----------------	--

Finishing

Lacquering / Leather	Lacquering "Golden Light" Lacquering "Powder Light" Opaque Minted Lacquer Glossy Minted Lacquer RAL Lacquering Leather
Speaker Covers	Cuoietto Leather Leather Precious Leather

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 800 V / 1200 V Voltage: 630 V / 400 V Tolerance: ± 2 % Tolerance: ± 5 %
Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%



OUTDOOR HIGH END SPEAKERS

The outdoor speakers are designed and built with weatherproof high end materials and components. It is a fullrange speakers with closed box.

Created for maximum stability with VESA standard support.



En Plein Air outdoor speakers. Made with high-temperature resistant transducers and components. This enables you to enjoy high-quality music even outdoors, without overlooking the design. Personalized finishes are also customized in weather-resistant RAL lacquers.

The speakers are held with standard VESA supports.

Specifications

Speaker:	Pneumatic suspension, 1 way WideRange Closed Box
Nominal Impedance:	8 Ohm
Frequency Range: (+/- 3dB)	68 Hz – 18.000 Hz
Sensitivity:	89 dB, 1m, 2,83V
Woofer:	Cono da 220mm di diametro, membrana di polipropilene con ridotta risonanza, Ampio sistema motore, Resistente alle intemperie
Peak Power:	90 W
Maximum input power (without distortions):	50 W
Spatial dispersion:	-3 dB a 30° from axis at 10.000 Hz -12 dB a 60° rom axis at 10.000 Hz
Volume :	21 Liters
Biniding Post:	"Banana" & "fork" shaped connectors, and unsheathed cable up to 6mm diameter
Dimensions:	650mm (L) x 300mm (H) x 180mm (W)

Structure

Structure Component	Pyramid shaped polyurethane 30Kg / m3
Care Orchestra Multi Layer	MDF

Materials and Components	Weatherproof
-----------------------------	--------------

Internal Wiring	Crystal OFC Silvered total section for single conductor 1.97 mm ² , resistance 0.88 Ohm / 100 meters
-----------------	---

Finishing

Lacquering / Leather	Glossy Lacquering "Golden Light" Opaque Lacquering "Powder Light" Opaque Minted Lacquer Glossy Minted Lacquer RAL Lacquering Leather
----------------------	---



LIMITED EDITION

Unique pieces, numbered and limited editions: when the music takes the form of art.



Every speaker is a unique piece, as peculiar and unrepeatable as the block of marble from which it is born.

The full range bass reflex technology for the speaker is made from a peculiar block of stone and is more valuable. The Carrara marble is a material that gives thanks to the anisotropic and rigid structure. Shades and tones of excellence: the sound comes to life.

Specifications

Speaker:	Zero Offset – 1 way – Bass Reflex
Nominal Impedance:	8 Ohm
Frequency Range: (+/- 3dB)	58 Hz – 21.000 Hz
Sensitivity:	85 dB, 1m, 2,83V
Woofer	TB – Titanium cone, 120mm diameter, Wide engine system, UnderHung Engine Configuration.
Peak Power:	80 W
Maximum input power (without distortions):	60W
Spatial dispersion:	-3 dB a 30° from axis at 10.000 Hz -10 dB a 60° from axis at 10.000 Hz
Volume:	4,6 Liters
Biniding Post:	"Banana" & "fork" shaped connectors, and unsheathed cable up to 6mm diameter
Dimensions:	170mm (L) x 240mm (H) x 235mm (W)

Structure

Structure Component	Expanded Polyurethane with 3 cm cones - 30Kg/m ³ Cork 6mm MDF ultra high density Fir
Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response.
Internal Wiring	Van Den Hul Unipolar Copper OFC Silver Hullyflex 3,3 mmq (157 wires) 300V Resistance 20 ° C / 68 ° F, 0.58 Ohm / 100 m

Finishing

Lacquering / Leather	Lacquering "Golden Light" Lacquering "Powder Light" RAL Lacquering Leather
Speaker Covers	Cuoietto Leather Leather Precious Leather

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 630 V / 400 V Tolerance: ± 5 %
Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%





The Angelica speakers consists of the state of the art audiophile technology.

It is a 3 way free standing speaker with zero offset, concurrent bass reflex, a loose base with 2 degrees for the perfect positioning in terms of the angle of rotation, crossover and silver wiring; also for block houses. It is available in wood and marble material finishes.

Specifications

Speaker:	3 vie Bass Reflex
Nominal Impedance:	4 Ohm
Frequency Range: (+/- 3dB)	24 Hz – 40.000 Hz
Sensiivity:	92,5 dB, 1m, 2,83V
Woofer:	Scan-Speak Discovery – 220mm Fibre Glass Cone & dust cap, High sensitivity, Long Linear excursion, Diecast Aluminium basket, Vents below spider, Low damping rubber surround
Midrange:	Scan-Speak Discovery – Aluminium Chassis, 150mm Fibreglass Cone, Phase plug, Coated foam surround.
Tweeter:	Scan-Speak Discovery – Soft-dome, textile membrane, Low Distorsion
Peak Power:	280 W
Maximum input power (without distortions):	170W
Crossover Filter:	2° electric order Cutting frequency: 780 Hz, 2970 Hz
Spatial dispersion:	-2 dB at 30° from axis at 10.000 Hz -10 dB at 60° from axis at 10.000 Hz
Volume :	86 Liters, 8 Liters
Biniding Post:	"Banana" & "fork" shaped connectors, and unsheathed cable up to 6mm diameter
Dimensions:	347 mm (L) x 1211 mm (H) x 485 mm (W)

Structure

Structure Component	Expanded Polyurethane with 3 cm cones - 30Kg/m ³ Cork 6mm MDF ultra high density Fir
Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response.
Internal Wiring	Van Den Hul Unipolar Copper OFC Silver Hullyflex 3.3 mmq (157 wires) 300V Resistance 20 ° C / 68 ° F, 0.58 Ohm / 100 m

Finishing

Lacquering / Leather	Lacquering "Golden Light" Lacquering "Powder Light" RAL Lacquering Leather
Speaker Covers	Cuoietto Leather Leather Precious Leather

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 630 V / 400 V Tolerance: ± 5 %
Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%

AUDIO PRO



Seed is a 2-way vertical column-mounted speaker, professional, with high acoustic characteristics both on voices and in low tones, despite its size.

Ideal for professional environments, churches, meeting rooms, meeting rooms.

Specifications

Speaker:	2 way; Pneumatic Suspension
Nominal Impedance:	8 Ohm
Frequency Range:	80 Hz – 20.000 Hz
(+/- 3dB)	
Sensiivity:	91 dB, 1m, 2,83V
Woofer:	Scan-Speak Discovery –120 mm diameter glass fiber cone, magnetic system with aluminum ring.
Tweeter:	Tweeter dome with fabric membrane and a very low distortion.
Peak Power:	140 W
Maximum input power (RMS):	100 W, without distortion
Spatial dispersion:	-5 dB a 30° from axis at 10.000 Hz -15 dB a 60° from axis at 10.000 Hz
Volume :	8.6 Liters
Crossover Filter:	1° e 2° electric order
Binding Post:	"Banana" connectors, unsheathed cable up to 6mm diameter
Dimensions:	157 mm (L) x 500 mm (H) x 110 mm (W)
Weight:	8 Kg

Structure

Structure Component	Expanded Polyurethane with 3 cm cones - 30Kg/m ³
Care Orchestra Multi Layer	Cork 6mm MDF ultra high density Fir
Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response.
Internal Wiring	Van Den Hul Unipolar Copper OFC Silver Hullyflex 3.3 mmq (157 wires) 300V Resistance 20 ° C / 68 ° F, 0.58 Ohm / 100 m

Finishing

Lacquering / Leather	Lacquering "Golden Light" Lacquering "Powder Light" RAL Lacquering Leather
Speaker Covers	Cuoietto Leather Leather Precious Leather

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 630 V / 400 V Tolerance: ± 5 %
Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%





Seed Tower is a 2-way, vertical column, professional speaker with high acoustic characteristics both on voices and in low tones, despite its size.

Ideal for professional environments, churches, meeting rooms, large conference rooms.

Specifications

Speaker:	2 way; Pneumatic Suspension
Nominal Impedance:	4 Ohm
Frequency Range: (+/- 3dB)	80 Hz - 20.000 Hz
Sensitivity:	97 dB, 1m, 2,83V
Woofer:	Scan-Speak Discovery -120 mm diameter glass fiber cone, magnetic system with aluminum ring.
Tweeter:	Tweeter dome with fabric membrane and a very low distortion.
Peak Power:	280 W
Maximum input power (RMS):	200 W, without distortion
Spatial dispersion:	-5 dB a 30° from axis 10.000 Hz -15 dB a 60° from axis 10.000 Hz
Volume :	15.54 Liters
Crossover Filter:	1° e 2° electric order
Binding Post:	"Banana" connectors, unsheathed cable up to 6mm diameter
Dimensions:	157 mm (L) x 900 mm (H) x 110 mm (W)
Weight:	10 Kg

Structure

Structure Component	Expanded Polyurethane with 3 cm cones - 30Kg/m ³ Cork 6mm MDF ultra high density Fir
Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response.
Internal Wiring	Van Den Hul Unipolar Copper OFC Silver Hullyflex 3.3 mmq (157 wires) 300V Resistance 20 ° C / 68 ° F, 0.58 Ohm / 100 m

Finishing

Lacquering / Leather	Lacquering "Golden Light" Lacquering "Powder Light" RAL Lacquering Leather
Speaker Covers	Cuoietto Leather Leather Precious Leather

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 630 V / 400 V Tolerance: ± 5 %
Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%



AUDIO-VIDEO

The new Soundbar Theater, born to fit and fit under the new Led TV, is surprising with its ability to play the three main audio channels, the left, right and center channels.

Necessary when you can not place the left and right channels on the sides of the TV but you have space below this.

Passive acoustic speaker for AV amplifiers for High End Home Cinema.



Specifications

Structure	
Structure Component	Expanded Polyurethane with 3 cm
Care Orchestra Multi	cones - 30Kg/m ³
Layer	Cork 6mm
	MDF ultra high density
	Fir
Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response.
Internal Wiring	Van Den Hul Unipolar Copper OFC Silver Hullyflex 3.3 mmq (157 wires) 300V
	Resistance 20 ° C / 68 ° F, 0.58 Ohm / 100 m

Passive Speaker:	Center Channel with double Widerange transducers, Left and Right channel 2 ways with Bamboo transducers and a Bass Reflex
Nominal Impedance:	4 Ohm
Frequency Range:	64 Hz – 20.000 Hz
(+/- 3dB)	
Sensiivity:	88 dB, 1m, 2,83V
Woofer:	TB – 120 mm bamboo woofer in diameter, UnderHung Motor Configuration
Peak Power:	80 W
Maximum input power (without distortions):	60W
Spatial dispersion:	-3 dB a 30° from axis at 10.000 Hz
	-12 dB a 60° from axis at 10.000 Hz
Volume :	7 Liters for left and right channel, 5 liters for center channel
Biniding Post:	"Banana" & "fork" shaped connectors, and unsheathed cable up to 6mm diameter
Dimensions:	1050 mm (L) x 150 mm (H) x 300 mm (W)

Finishing

Lacquering / Leather	Lacquering "Golden Light" Lacquering "Powder Light" RAL Lacquering Leather
Speaker Covers	Cuoietto Leather Leather Precious Leather

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast
	Voltage: 630 V / 400 V
	Tolerance: ± 5 %
Resistors	Resistance to metal oxide
	Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance
	Conductor OFC 99.99%



CENTER CHANNEL SPEAKERS

For a voice either male or female, faithful, precise, clear and well located: care orchestra's center channel speakers guarantee all this, and in more 'a popular design and infinite possibility of customization.



Way is a full-range central channel speaker, compact bass reflex, suitable for small and medium-sized environments, requiring a precise and definite audio-video system.

Ideal for reproducing voices in Audio Video/ Home Cinema systems.

Specifications

Speaker:	WideRange, Due Coni in Bamboo trattato, Bass Reflex
Nominal Impedance:	4 Ohm
Frequency Range: (+/- 3dB)	68 Hz – 16.000 Hz
Sensiivity:	87 dB, 1m, 2,83V
Woofer:	TB – Cone is of treated bamboo paper, 120mm diameter, Wide engine system, UnderHung Engine Configuration.
Peak Power:	80 W
Maximum input power (without distortions):	60W
Spatial dispersion:	-3 dB a 30° from axis at 10.000 Hz -12 dB a 60° from axis at 10.000 Hz
Volume :	7 Liters
Biniding Post:	"Banana" & "fork" shaped connectors, and unsheathed cable up to 6mm diameter
Dimensions:	450 mm (L) x 150 mm (H) x 220 mm (W)

Structure

Structure Component	Expanded Polyurethane with 3 cm Care Orchestra Multi Layer
Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response.
Internal Wiring	Van Den Hul Unipolar Copper OFC Silver Hullyflex 3,3 mmq (157 wires) 300V Resistance 20 ° C / 68 ° F, 0,58 Ohm / 100 m

Finishing

Lacquering / Leather	Lacquering "Golden Light" Lacquering "Powder Light" Opaque Minted Lacquer Glossy Minted Lacquer RAL Lacquering Leather
----------------------	---

Speaker Covers	Cuoietto Leather Leather Precious Leather
----------------	---

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 630 V / 400 V Tolerance: ± 5 %
Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%



CENTRAL CHANNEL WAY TITANIUM EDITION



Way Titanium is a full-range central channel speaker, compact bass reflex, suitable for small and medium-sized environments, requiring a precise and definite audio-video system.

The pair of titanium diffusers maximizes the warmth of the male voices and the freshness of the feminine ones.

Specifications

Speaker:	WideRange, double cone, Bass Reflex
Nominal Impedance:	4 Ohm
Frequency Range: (+/- 3dB)	68 Hz – 16.000 Hz
Sensiivity:	88 dB, 1m, 2,83V
Woofer:	TB – Titanium cone, 120mm diameter, Wide engine system, UnderHung Engine Configuration.
Peak Power:	80 W
Maximum input power (without distortions):	65W
Spatial dispersion:	-3 dB a 30° from axis at 10.000 Hz -12 dB a 60° from axis at 10.000 Hz
Volume :	7 Liters
Biniding Post:	"Banana" & "fork" shaped connectors, and unsheathed cable up to 6mm diameter.
Dimensions:	450 mm (L) x 150 mm (H) x 220 mm (W)

Structure

Structure Component	Expanded Polyurethane with 3 cm cones - 30Kg/m ³ Cork 6mm MDF Fir
---------------------	---

Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response.
---------------	--

Internal Wiring	Van Den Hul Unipolar Copper OFC Silver Hullyflex 3,3 mmq (157 wires) 300V Resistance 20 ° C / 68 ° F, 0,58 Ohm / 100 m
-----------------	--

Finishing

Lacquering / Leather	Lacquering "Golden Light" Lacquering "Powder Light" Opaque Minted Lacquer Glossy Minted Lacquer RAL Lacquering Leather
----------------------	--

Speaker Covers	Cuoietto Leather Leather Precious Leather
----------------	---

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 630 V / 400 V Tolerance: ± 5 %
------------	--

Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
-----------	---

Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%
-------	---





Eye is a High End Center Channel Speaker, bass reflex, powerful, precise and elegant. It is perfect for the reproduction of both the male and female voices. It is recommended for cinema halls of medium to large sizes. It is perfectly paired with high dimensions speakers.

Specifications

Speaker:	2 way, Bass Reflex
Nominal Impedance:	8 Ohm
Frequency Range: (+/- 3dB)	44 Hz - 22.000 Hz
Sensiivity:	90 dB, 1m, 2,83V
Woofer:	Doppio Woofer Seas Prestige da 150mm schermati, membrana in carta trattata, lunga escursione della membrana per massima linearità
Tweeter:	Tweeter Tang Band con membrana in seta da 28mm con camera posteriore, magnete in neodimio e errofluido, batuffolo di lana dietro la membrana, flangia in ABS
Peak Power:	250 W
Maximum input power (without distortions):	100W
Crossover Filter:	2° electric order Cutting frequency: 2900 Hz
Spatial dispersion:	-4 dB a 30° from axis at 10.000 Hz -13 dB a 60° rom axis at 10.000 Hz
Volume :	23 Liters
Biniding Post:	"Banana" & "fork" shaped connectors, and unsheathed cable up to 6mm diameter
Dimensions:	550mm (L) x 190mm (H) x 390mm (W)

Structure

Structure Component Care Orchestra Multi Layer	Expanded Polyurethane with 3 cm cones - 30Kg/m ³ Cork 6mm MDF Fir
Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response.
Internal Wiring	Van Den Hul Unipolar Copper OFC Silver Hullyflex 3.3 mmq (157 wires) 300V Resistance 20 ° C / 68 ° F, 0.58 Ohm / 100 m

Finishing

Lacquering / Leather	Lacquering "Golden Light" Lacquering "Powder Light" Opaque Minted Lacquer Glossy Minted Lacquer RAL Lacquering Leather
Speaker Covers	Cuoietto Leather Leather Precious Leather

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 400 V Voltage: 630 V / 400 V Tolerance: ± 5% Tolerance: ± 5 %
Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%



ACTIVE SUBWOOFERS

Live the movie, feel it in the background. No film effect is worth plenty of attention like the low frequency of a subwoofer.

Care orchestra's subwoofers transform the emotional sound, to an effect that becomes almost physical.



Earthquake 2.0 is a high-end 200W (RMS) subwoofer suitable for small and medium-sized home cinema rooms and is the perfect complement and addition to a TV and cinema room.

It makes you not to miss even the smallest cinematic effect.

Specifications

Subwoofer with AUTO Stand-By:	Active , Closed box
Frequency Range:	30 - 200 Hz, with upper cut-off frequency adjustment
Continuous output power:	200 W (RMS) on 4 Ohm
Peak Power:	280 W on 4 OHM
Connections Input / Output:	RCA jacks
Input Sensitivity (RCA Input):	170 mV (rms)
Phase adjustments:	0 - 180°, 180° - 360°
Signal to Noise Ratio:	>70 dB
Total Harmonic Distortion:	<0.1 %
Crossover Frequency:	20 Hz - 200 Hz
Input Impedance (RCA Input):	20 KOhm
Power Supply:	120V / 230V - 50/60 Hz
Power consumption -Full load:	330 VA
Power consumption - No load:	24 VA
Consumo in Stand-By:	<0.5 W
Dimensions:	350 mm (L) x 440 mm (H) x 350 mm (P)
Ambient temperature:	5-35 °C
Weight:	24 Kg

Structure

Structure Component	Expanded Polyurethane with 3 cm cones - 30Kg/m ³ Cork 6mm MDF Fir
Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response.
Internal Wiring	Van Den Hul Unipolar Copper OFC Silver Hullyflex 3.3 mmq (157 wires) 300V Resistance 20 ° C / 68 ° F, 0.58 Ohm / 100 m

Finishing

Lacquering / Leather	Lacquering "Golden Light" Lacquering "Powder Light" Opaque Minted Lacquer Glossy Minted Lacquer
----------------------	---

Speaker Covers	Cuoietto Leather Leather Precious Leather
----------------	---

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 630 V / 400 V Tolerance: ± 5 %
Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%





Earthquake 3.0 is a High End 300 Watt (RMS) active subwoofer. It is small in size, suitable for medium and large sized cinema rooms. It is a perfect addition to a TV or cinema room, where you would not want to miss out on the smallest movie effect.

Specifications

Subwoofer with AUTO Stand-By:	Active , Closed box
Frequency Range:	25 - 200 Hz, with upper cut-off frequency adjustment
Continuous output power:	300 W (RMS) on 4 Ohm
Peak Power:	420 W on 4 OHM
Input Connections:	RCA Jacks, High Level
Output Connections:	RCA
Input Sensitivity Line IN:	170 mV
Max Input Voltage Line IN:	7 V
Input Sensitivity	1 Vrms
(High Level Input):	
Line IN Impedance:	22 KOhm
High Level Input Impedance:	270 Ohm
Phase adjustments:	0 - 180°, 180° - 360°
Signal to Noise Ratio:	>70 dB
Total Harmonic Distortion:	<0.1 %
Crossover Frequency:	20 Hz - 200 Hz
Protections:	Short output circuits
Power Supply:	120V / 230V - 50/60 Hz
Power consumption -Full load:	440 VA
Power consumption - No load:	24 VA
Dimensions:	310 mm (L) x 362 mm (H) x 300 mm (P)
Ambient temperature:	5-35 °C
Weight:	18 Kg

Structure

Structure Component	Expanded Polyurethane with 3 cm cones - 30Kg/m ³
Care Orchestra Multi Layer	Cork 6mm MDF Fir
Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response.
Internal Wiring	Van Den Hul Unipolar Copper OFC Silver Hullyflex 3.3 mmq (157 wires) 300V Resistance 20 ° C / 68 ° F, 0.58 Ohm / 100 m

Finishing

Lacquering / Leather	Lacquering "Golden Light" Lacquering "Powder Light" RAL Lacquering Leather
Speaker Covers	Cuoietto Leather Leather Precious Leather

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 630 V / 400 V Tolerance: ± 5 %
Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%





Earthquake 3.0 Slim is a High End 300 Watt (RMS) active subwoofer. It is very small in size, suitable for medium and large sized cinema rooms. It is a perfect addition to a TV or cinema room, where you would not want to miss out on the smallest movie effect.

Specifications

Subwoofer with AUTO Stand-By:	Active , Closed box
Frequency Range:	25 - 200 Hz, with upper cut-off frequency adjustment
Continuous output power:	300 W (RMS) on 4 Ohm
Peak Power:	420 W on 4 OHM
Input Connections:	RCA Jacks, High Level
Output Connections:	RCA
Input Sensitivity Line IN:	170 mV
Max Input Voltage Line IN:	7 V
Input Sensitivity	1 Vrms
(High Level Input):	
Line IN Impedance:	22 KOhm
High Level Input Impedance:	270 Ohm
Phase adjustments:	0 - 180°, 180° - 360°
Signal to Noise Ratio:	>70 dB
Total Harmonic Distortion:	<0.1 %
Crossover Frequency:	20 Hz - 200 Hz
Protections:	Short output circuits
Power Supply:	120V / 230V - 50/60 Hz
Power consumption -Full load:	440 VA
Power consumption - No load:	24 VA
Dimensions:	265 mm (L) x 362 mm (H) x 320 mm (P)
Ambient temperature:	5-35 °C
Weight:	18 Kg

Structure

Structure Component	Expanded Polyurethane with 3 cm cones - 30Kg/m ³
Care Orchestra Multi Layer	Cork 6mm MDF Fir
Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response.
Internal Wiring	Van Den Hul Unipolar Copper OFC Silver Hullyflex 3.3 mmq (157 wires) 300V Resistance 20 ° C / 68 ° F, 0.58 Ohm / 100 m

Finishing

Lacquering / Leather	Lacquering "Golden Light" Lacquering "Powder Light" RAL Lacquering Leather
Speaker Covers	Cuoietto Leather Leather Precious Leather

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 630 V / 400 V Tolerance: ± 5 %
Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%





Earthquake 4.0 is a High End 300 Watt (RMS) active subwoofer suitable for medium and large sized cinema rooms. It is a perfect addition to a TV or cinema room, where you would not want to miss out on the smallest movie effect.

Specifiche Tecniche

Subwoofer with AUTO Stand-By:	Active , Closed box
Frequency Range:	25 - 200 Hz, with upper cut-off frequency adjustment
Continuous output power:	300 W (RMS) on 4 Ohm
Peak Power:	420 W on 4 OHM
Input Connections:	RCA Jacks, High Level
Output Connections:	RCA
Input Sensitivity Line IN:	170 mV
Max Input Voltage Line IN:	7 V
Input Sensitivity (High Level Input):	1 Vrms
Line IN Impedance:	22 KOhm
High Level Input Impedance:	270 Ohm
Phase adjustments:	0 - 180°, 180° - 360°
Signal to Noise Ratio:	>70 dB
Total Harmonic Distortion:	<0.1 %
Crossover Frequency:	20 Hz - 200 Hz
Protections:	Short output circuits
Power Supply:	120V / 230V - 50/60 Hz
Power consumption -Full load:	440 VA
Power consumption - No load:	24 VA
Power consumption - Standby:	<0.5 W
Dimensions:	350 mm (L) x 440 mm (H) x 350 mm (W)
Ambient temperature:	5-35 °C
Weight:	2 Kg

Structure

Structure Component	Expanded Polyurethane with 3 cm cones - 30Kg/m ³
Care Orchestra Multi Layer	Cork 6mm MDF Fir
Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response.
Internal Wiring	Van Den Hul Unipolar Copper OFC Silver Hullyflex 3.3 mmq (157 wires) 300V Resistance 20 ° C / 68 ° F, 0.58 Ohm / 100 m

Finishing

Lacquering / Leather	Lacquering "Golden Light" Lacquering "Powder Light" RAL Lacquering Leather
Speaker Covers	Cuoietto Leather Leather Precious Leather

Crossover Filter

Capacitors	Audiophile Capacitors Ultra Fast Voltage: 630 V / 400 V Tolerance: ± 5 %
Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%



ELECTRONICS



The Whisper amplifier is the newest integrated HI FI High End amplifier from Care Orchestra.

An integrated class AB of the highest level, with an exceptional signal / noise ratio above 100dB. All enclosed in a lacquered wood and fine leather structure.

A very high frequency range from 8 Hz to 125 KHz (+/- 1.5dB) and ensures you do not lose any nuance. It has the power of over 150 Watts (RMS) on 4 Ohms which provides all the power needed to drive even the most demanding speakers.

The balanced and unbalanced high end inputs guarantee maximum flexibility.

The finishes are chosen by the customer, like all Care Orchestra products.

Structure

Structure Component
Care Orchestra Multi Layer

Expanded Polyurethane with 3 cm cones - 30Kg/m³
Cork 6mm
MDF
Fir

Frontal Panel

Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response.

Internal Wiring

Van Den Hul Unipolar Copper
OFC Silver Hullyflex 3.3 mmq (157 wires) 300V
Resistance 20 ° C / 68 ° F, 0.58 Ohm / 100 m

Specifications

Amplifier:	Integrated solid state class AB
Transistors of final : section of power	4 x SC5200, 4 x 2SA1943
Output Power (1KHz):	2 x 75W (8 Ohm), 2 x 150W (4 Ohm), 2 x 150W (2 Ohm)
Total Harmonic Distortion (1W):	0,2 %
Bandwidth (1W):	8 Hz – 125 KHz, +/- 1,5 dB
Negative Feedback:	10 dB
Signal to Noise Ratio:	>100 dB
Input Impedance:	100 KΩ (RCA), 200 KΩ (XLR)
Pre-amplifier Input:	2 x RCA, 1 x XLR
Power Supply:	120V / 230V – 50/60 Hz, 300VA Max
Dimensions:	500 mm (L) x 180 mm (H) x 500 mm (W)
Weight:	20 Kg

Finishing

Lacquering / Leather

Lacquering “Golden Light”
Lacquering “Powder Light”
Metallic RAL Lacquers
Micalized RAL lacquering

Heat Dissipators Finishes

Glossy Lacquering “Golden Light”
Opaque Lacquering “Powder Light”

Speaker Covers

Cuoietto Leather | Leather | Precious Leather



HYBRID VOICE AMPLIFIER



The Hybrid Amplifier voice is a result of the commitment of Care Orchestra in an audiophile amplification sector and represents the perfect complement of the audio speakers, both technical, style and design.

It is an integrated high polarized class AB1 hybrid amplifier whose High End heart beat is enclosed in a structure of lacquered wood and fine leather.

The valve preamplifier section offers a full and warm sound with realistic male and female voices.

The final section of power with discrete elements to ensure maximum transient speed and deliver maximum undistorted power on both 8 and 4 and 2 ohms.

Balanced and Unbalanced Inputs.

Specifications

Amplifier:	Hybrid Integrated stereo class AB
Valve preamplifier: section	12AX7B
Transistors of final : section of power	2SC5200 and 2SA1943
Output Power (1KHz):	2 x 110W (8 Ohm), 2 x 220W (4 Ohm)
Total Harmonic Distortion (1W):	0,2 %
Bandwidth (1W):	1 Hz – 60 KHz
Damping Factor:	>100
Signal to Noise Ratio:	>100 dB
Input Impedance:	100 KΩ (RCA), 200 KΩ (XLR)
Pre-amplifier Input:	2 x RCA, 2 x XLR, Direct amplification
Power Supply:	120V / 230V – 50/60 Hz, 600VA Max
Dimensions:	500 mm (L) x 163 mm (H) x 500 mm (P)
Weight:	20 Kg

Structure

Structure Component Care Orchestra Multi Layer	Expanded Polyurethane with 3 cm cones - 30Kg/m ³ Cork 6mm MDF Fir
Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response.
Internal Wiring	Van Den Hul Unipolar Copper OFC Silver Hullyflex 3.3 mmq (157 wires) 300V Resistance 20 ° C / 68 ° F, 0.58 Ohm / 100 m

Finishing

Lacquering / Leather	Lacquering “Golden Light” Lacquering “Powder Light” Metallic RAL Lacquers Micalized RAL lacquering
Heat Dissipators Finishes	Glossy Lacquering “Golden Light” Opaque Lacquering “Powder Light”
Speaker Covers	Cuoietto Leather Leather Precious Leather





Digital Analog Design Converter

Based on double Burr Brown PCM1794A in Monoaural configuration for a mind-blowing Signal / Noise ratio above 132 dB.

Resolution 24-bit and 192 kHz Sampling, Advanced Segment. S / PDIF input zero jitter design with PLL (phase locked loop) receiver.

Stabilized power supply to discrete components without use of voltage regulators.

Analog stage with discrete components without the use of op-amp.

Passive voltage current converter.

There are separate transformers for the analog and digital part with dedicated stabilization circuits.

Specifications

DAC	Digital Analog Design Converter - 2x Burr Brown PCM1794A in Monoaural configuration (S / N Ratio > 132 dB). - 24 Bit, 192 kHz Sampling, Advanced Segment. - S / PDIF input zero jitter design with PLL (phase locked loop) receiver. - Stabilized power supply to discrete components without use of voltage regulators - Analog stage with discrete components without using op-amp - Passive voltage current converter - Separate transformers for the analog and digital part with dedicated stabilization circuits
Digital Audio Input:	Coax, XLR Balanced, TOSLINK, USB
Sample Rates:	- I2S, S/PDIF, and USB -- 44.1kHz to 192kHz 16bit, 24bit - TOSLINK - 44.1kHz to 96kHz 16bit, 24bit
Analog Audio Output:	- Connectors: RCA / XLR Balanced - Frequency Response: 20-20.000 Hz +/- 0.25dB - THD+N @ 1kHz (full scale); < 0.03%
Data Handling:	Formats: PCM Sample rate (PCM): 44.1kHz, 48.0kHz, 88.2kHz, 96.0kHz, 176.4kHz, 192kHz, Word length (PCM); 16b, 18b, 20b, 24b Input jitter reduction: effectively 100%, residual immeasurable. No input PLLs, FLLs. Digital Processing S/N ration; > 132 dB
USB Digital Input:	Analog Conversion method; ADVANCED SEGMENT DAC Connector: USB "B" Type Format: PCM Transfer mode: Asynchronous
Compatible Operating Systems:	Microsoft Windows 7, 10 IOS 10.x
Digital Input:	2 x TOSLINK, 2 x Coax, 1 x AES-EBU, 1 x USB
Power requirements:	120V / 230V - 50/60 Hz, 30VA Max
Dimensions:	408 mm (L) x 163 mm (H) x 442 mm (P)
Weight:	12 Kg

Structure

Structure Component	Expanded Polyurethane with 3 cm
Care Orchestra Multi Layer	cones - 30Kg/m3 Cork 6mm MDF Fir
Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response.
Internal Wiring	Van Den Hul Unipolar Copper OFC Silver Hullyflex 3.3 mmq (157 wires) 300V. Resistance 20 ° C / 68 ° F, 0.58 Ohm / 100 m

Finishing

Lacquering / Leather	Lacquering "Golden Light" Lacquering "Powder Light" Metallic RAL Lacquers Micalized RAL lacquering
Heat Dissipators	Glossy Lacquering "Golden Light"
Finishes	Opaque Lacquering "Powder Light"
Speaker Covers	Cuoietto Leather Leather Precious Leather



CROSSWAY is a design network distributor filter, equipped with 6 independent jacks and intended to be used in frequent cases in which disturbances in the electrical network are present. In addition, helps in transferring to your Hi-Fi equipment unwanted signals, and may also destroy such signals.

An ammeter and an analog measurement of class 2. Voltmeter allow to have always under control of the electricity network performance where the distributor is connected.

Specifications

Network Filter	230 V, shielded RFI noise suppressor
Type of sockets	6 schuko sockets
Wiring	Internal
Power Supply	230V/50Hz
Maximum load	2200W
Switch	Unipolar magnetothermic 10A
Power switch	Bipolar
Voltmeter	High precision analog, class 1.5
Ammeter	High precision analog, class 1.5
Panel socket	IEC 16A
Dimensions	450 mm (L) x 150 mm (H) x 220 mm (W)

Finishing

Lacquering / Leather	Lacquering "Golden Light" Lacquering "Powder Light" Metallic RAL Lacquers Micalized RAL lacquering
Heat Dissipators Finishes	Glossy Lacquering "Golden Light" Opaque Lacquering "Powder Light"
Speaker Covers	Cuoietto Leather Leather Precious Leather



FURNITURE



A strong Electronic Furniture design for Hi Fi and Home Cinema. It is custom built in width, height and depth.

Finishes chosen by color and materials for a technical piece of furniture that adapts perfectly to any furnishing solution.

Specifications

Furniture	Double shelf
Shelf Thickness	44 mm
Leg Thickness	44 mm
Dimensions	1.248mm (L)x 515mm (H)x 540mm (W); 1.200mm (L)x 515mm (H)x 600mm (W) also on the requirement of the Clients

Struture

Frontal Panel	Asymmetric Front Panel CARE ORCHESTRA Asymmetrical response.
---------------	--

Finiture

Lacquering / Leather	Lacquering “Golden Light” Lacquering “Powder Light” RAL Lacquering Leather
Covers	Cuoietto Leather Leather Precious Leather



INWALL SOLUTIONS



The great music, the pure sound, no obstruction. The products taken from the "visible" series guarantee excellent performance without taking out space for the interior furniture. They are simply embedded and visible on the wall or on the ceiling.

Elegant solutions are taken from the walls and ceilings with minimum visibility but of design.

As finishes for the in-wall speakers can be applied like traditional finishes of wall and ceiling.

Specifications

Speaker:	Full Range Bass Reflex
Nominal Impedance:	4 Ohm
Frequency Range:	68 Hz – 18.000 Hz
(+/- 3dB)	
Sensiivity:	88 dB, 1m, 2,83V
Woofer:	Cone treated in polypropylene, 120mm in diameter
Peak Power:	40 W
Maximum input power (without distortions):	20W
Spatial dispersion:	-3 dB a 30° from axis at 10.000 Hz -12 dB a 60° from axis at 10.000 Hz
Volume:	4,6 Liters
Biniding Post:	"Banana" & "fork" shaped connectors, and unsheathed cable up to 6mm diameter
Dimensions:	560mm (L) x 220mm (A) x 90 mm (W)

Structure

Structure Component	Expanded Polyurethane with 3 cm
Care Orchestra Multi Layer	cones - 30Kg/m3 MDF

Internal Wiring	Copper OFC 0.88 Ohm / 100 m
-----------------	-----------------------------

Finishing

Possible Finish	Any material applied to the wall or drywall (for example; plaster, marble, wallpaper, painting)
-----------------	---

Crossover Filter

Capacitors	Audiophile Capacitors
------------	-----------------------

Resistors	Resistance to metal oxide Tolerance: +/-2% 1000V
-----------	---

Coils	High-purity copper wire baked in perfect shape to create a distortion-free inductor. High-purity copper wire wound around a Permite core, for a high inductance Conductor OFC 99.99%
-------	---





High end in-wall speakers, completely invisible, inserted into the inside of the ceiling for total and effective disappearance.

Pure sound to listen with the ears. No visible element, high end technology completely embedded into the interior walls or ceilings to which the finishes you prefer are applied.

Hybrid Wave Core Technology to best sound reproduction

The walls are intact without any damage, without a trace of the speakers. The notes are free to travel in perfect harmony within the environment that absorbs them.

Ideal for Multiroom System and Surround speakers.

Specifications - 2 way In-Wall; 2012

Speaker:	2 way, Pneumatic suspension
Nominal Impedance:	4 Ohm
Frequency Range:	50 Hz - 20.000 Hz (+/- 10dB)
Sensiivity:	86 dB
Technology:	Hybrid Wave Core
Filter:	1° electric order
Maximum input power (without distortions):	30W (RMS)
Finish:	Finish for walls and ceilings
Biniding Post:	"Banana" & "fork" shaped connectors, and unsheathed cable up to 8mm diameter
Dimensions in:	520 mm (L) x 285 mm (H) x 80 mm (W)

Specifications - 2 way In-Wall; 2115

Speaker:	2 way, Pneumatic suspension
Nominal Impedance:	4 Ohm
Frequency Range:	40 Hz - 20.000 Hz (+/- 10dB)
Sensiivity:	86,5 dB
Technology:	Hybrid Wave Core
Filter:	1° electric order
Maximum input power (without distortions):	40W (RMS)
Finish:	Finish for walls and ceilings
Biniding Post:	"Banana" & "fork" shaped connectors, and unsheathed cable up to 8mm diameter
Dimensions in :	520 mm (L) x 285 mm (H) x 100 mm (W)

Specifications - 3 way In-Wall; 3115

Speaker:	3 way, Pneumatic suspension
Nominal Impedance:	4 Ohm
Frequency Range:	40 Hz - 20.000 Hz (+/- 10dB)
Sensiivity:	87 dB
Technology:	Hybrid Wave Core
Filter:	1° electric order
Maximum input power (without distortions):	45W (RMS)
Finish:	Finish for walls and ceilings
Biniding Post:	"Banana" & "fork" shaped connectors, and unsheathed cable up to 8mm diameter
Dimensions in:	520 mm (L) x 285 mm (H) x 100 mm (W)



Structure

Structure Component Care
Orchestra Multi Layer

Expanded Polyurethane with 3 cm cones - 30Kg/m³
MDF

Frontal Panel

Asynchronous load anti-refractory front panel

Internal Wiring

Copper OFC , total cross section for single conductor 1.97 mm², resistance 0.88
Ohm / 100 meters

Finishing

Possible Finish

any material applied to the wall or drywall (for example; plaster, marble, wallpaper,
painting)

Crossover Filter

Capacitors

Audiophile Capacitors

Resistors

Resistance to metal oxide
Tolerance: +/-2% 1000V

Coils

High-purity copper wire baked in perfect shape to create a distortion-free inductor.
High-purity copper wire wound around a Permite core, for a high inductance
Conductor OFC 99.99%

COVERS

MAGNETIC COVERS


For every product designed there are magnetic covers made available for the protection of the transducer speaker. Each cover is customized in different kinds of finish such as leather, plastic, wood etc.



PORTFOLIO

Design and construction of Multiroom system for Hotel Spagna Royal Suites, Rome. This was achieved through the use of invisible In-Wall loudspeakers



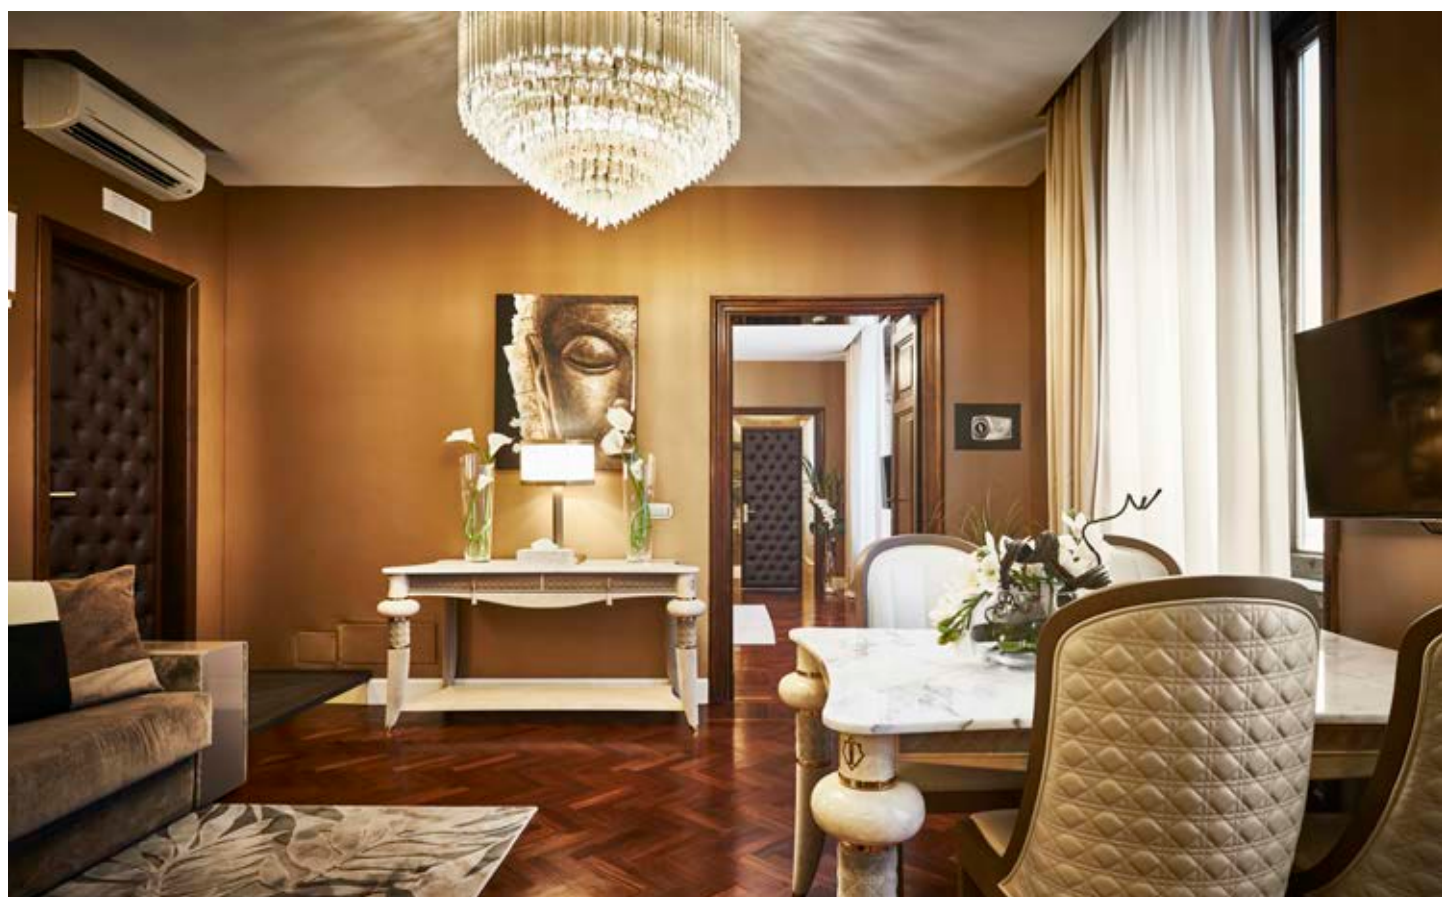



Atelier Durini 15, Milano, di Andrea Castrignano

Home cinema systems designed and constructed combined with the furnishings for the main lounge. Multi-room system managed by a home automation system with invisible In-Wall loudspeakers. Custom side tables designed and produced for the outdoor vases are integrated with home automation.








Style home cinema systems well designed and built to complement and amplify the furnishings in the main living room with the inclusion of invisible In-Wall speakers for the surrounding channels.



Design and construction of Hi-End Stereo systems.



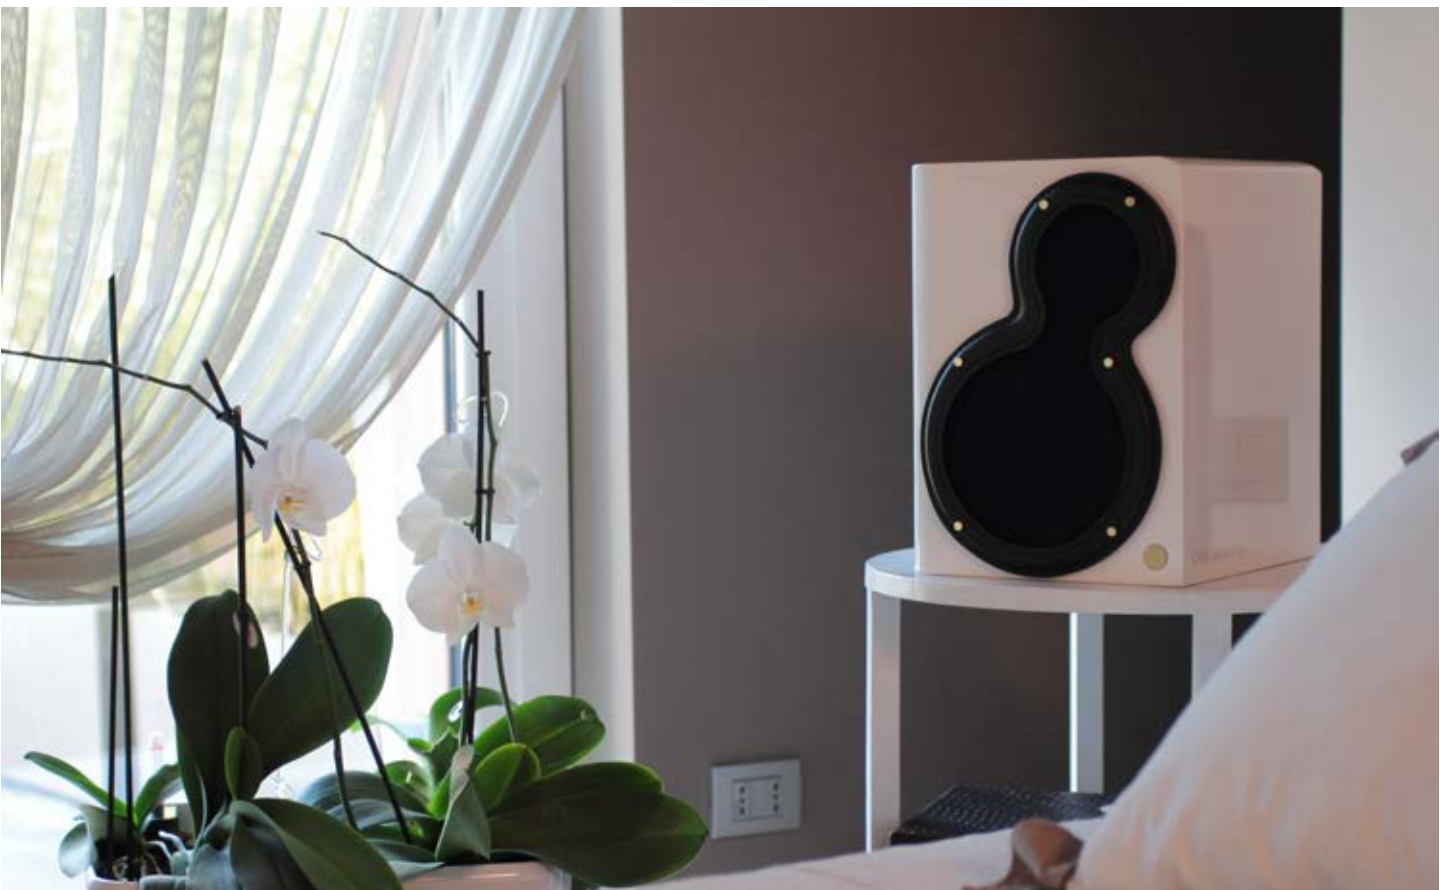

Design and construction of Hi-End Stereo systems, Home Cinema and invisible Multiroom integrated with, and complementing the furnitures.





MILANO LIVING TORTONA Residence

Design and construction of an invisible Stereo, Home Cinema and Multiroom system well intergrated with the furniture and other household appliances.









Care Orchestra s.r.l - Milano - Italy

contact@careorchestra.com
www.careorchestra.it