

BOLD
is
BEAUTIFUL

P5

A:Starke Sound, Inc.

17810 S. Main Street, Suite B Gardena,
CA 90248


E:service@starkesound.com

W:www.starkesound.com

T:+1 213 291 9484

Main Speaker
Professional Series

Born to the theater

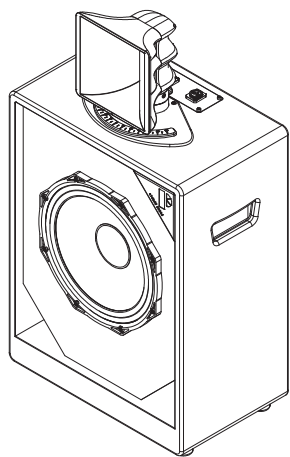


P5 is an ideal main channel (LCR) cinema speaker which can accurately convey all the large-scale dynamics and details to every seat within 15 meters. Its simple crossover maintains perfect phase consistency; the system's frequency response curve is smooth; and it delivers high sound pressure levels.

The "Black Rhino" AMTHorn®, specially developed by Starke Sound for the P Series, employs a large, folded diaphragm in a tweeter with 80 watts rms power-handling and response beyond 40 kHz. Its wide dispersion pattern can be tailored to any room using the built-in, vibration-damping swivel system. P5 is the essential main speaker for medium to large private theaters.


Connectors

P Series employ locking, industrial-grade connectors for sound quality, reliability and ease of installation. Neutrik speakON cables are the industry standard for amplifier/ loudspeaker connections, designed to operate in highcurrent, inductive load environments. In addition, Starke Sound developed the S-Link speaker connector with superior copper conductors to transport all of the rich sound details for ultimate sound quality.

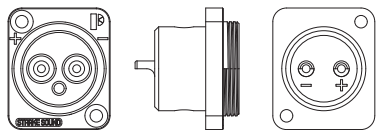


S-Link

Use a two-conductor cable for each channel
S-Link pins + to speaker cable "+"
S-Link pins - to speaker cable "-"

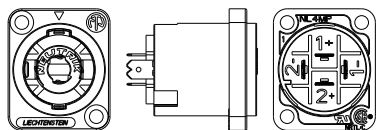

speakON

Use a two-conductor cable for each channel
speakON pins 1+ to speaker cable "+"
speakON pins 1- to speaker cable "-"

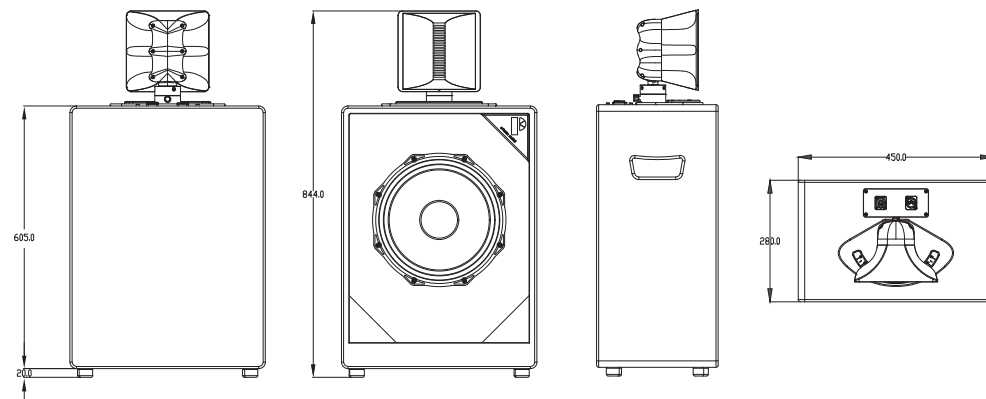

Technical specifications

Max SPL output(1m)	131dB
Frequency response (±2dB)	45Hz - 40kHz
Power (AES /Peak)	550W/1650W
Nominal impedance	8 ohms
Sensitivity (2.83v at 1m)	97dB
Drivers	(1) AMT160 Horn (25mm x 120mm) (1) 12 inch bass driver
Tweeter	AMT160 ("Black Rhino" AMTHorn®) Tweeter H x V 100° x 70° With DuPont Kapton film vibration-damping swivel system Super Low Distortion, High SPL out
Midbass / Bass driver	12 Inches High-strength cellulose fiber cone impregnated and coated on both sides with damped resins High-temperature stabilized Copper Clad Aluminium Wire(CCAW)
Cabinet Structure	Ported
Input terminals	Neutrik speakON input (2 pole, +-1) S-LINK Banana input
Crossover	2 way
Crossover points	3000 Hz
Grille	Cloth Grille on wood frame
Finish	Textured finish & Aluminum
Color options	Black
Full size	H 33.2 x W 17.7 x D 11 inches (with Black Rhino AMTHorn) H 844 x W 450 x D 280mm (with Black Rhino AMTHorn) H 24.6 x W 17.7 x D 11 inches (w/o Black Rhino AMTHorn) H 625 x W 450 x D 280mm (w/o Black Rhino AMTHorn)
Weight	65 lbs (29.5kg) / each
Shipping size	L 22.8 x W 16 x H 37.5 inches / L 578 x W 408 x H 952 mm
Shipping weight	77.8 lbs (35.3kg) / each
Warranty	5 years (from original purchase date)