



BOLD
is
BEAUTIFUL



P7

A:Starke Sound, Inc.

17810 S. Main Street, Suite B Gardena,
CA 90248


E:service@starkesound.com

W:www.starkesound.com

T:+1 213 291 9484

Main Speaker
Professional Series

New Benchmark for LCR

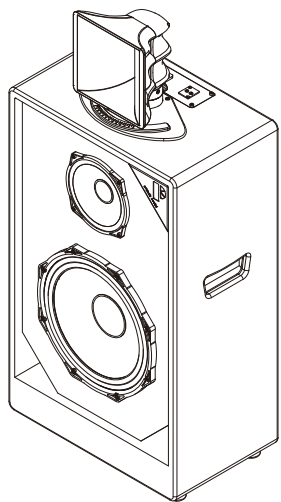


P7 is the latest expression of Starke Sound's signature, 3-way, high-performance loudspeakers. Compared to P5, P7's vocal reproduction is especially strengthened, with a powerful yet intimately detailed mid-range transducer. The advanced woofer provides a foundation that makes the overall sound stable and open.

The "Black Rhino" AMTHorn®, specially developed by Starke Sound for the P Series, employs a large, folded diaphragm in a tweeter with 80 watts rms power-handling and response beyond 40 kHz. Its wide dispersion pattern can be tailored to any room using the built-in, vibration-damping swivel system, which can be rotated 120 degrees from left to right.

P7 sets a new standard for the main speaker for medium to large private theaters.


Connectors

P Series employ locking, industrial-grade connectors for sound quality, reliability and ease of installation. Neutrik speakON cables are the industry standard for amplifier/ loudspeaker connections, designed to operate in highcurrent, inductive load environments. In addition, Starke Sound developed the S-Link speaker connector with superior copper conductors to transport all of the rich sound details for ultimate sound quality.

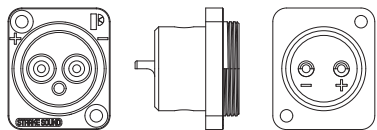


S-Link

Use a two-conductor cable for each channel
S-Link pins + to speaker cable "+"
S-Link pins - to speaker cable "-"

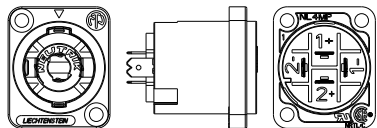

speakON

Use a two-conductor cable for each channel
speakON pins 1+ to speaker cable "+"
speakON pins 1- to speaker cable "-"

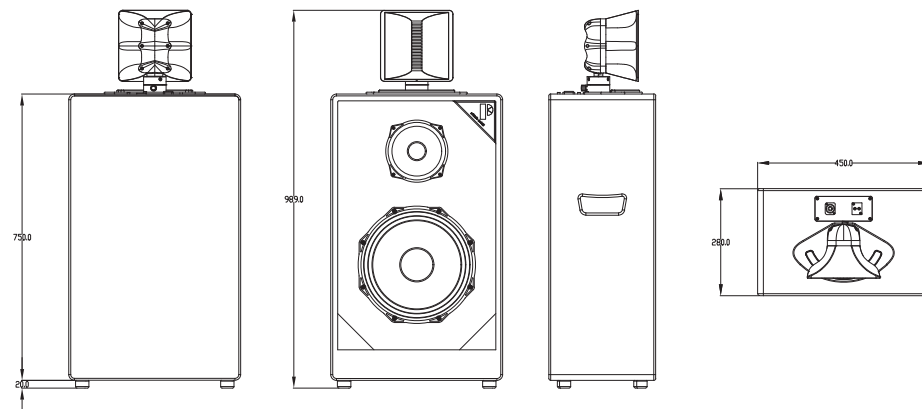

Technical specifications

Max SPL output(1m)	133dB
Frequency response (±2dB)	45Hz - 40kHz
Power (AES /Peak)	600W/1800W
Nominal impedance	8 ohms
Sensitivity (2.83v at 1m)	95dB
Drivers	(1) AMT160 Black Rhino AMTHorn (25mm x 120mm) (1) 6.5 inch midrange driver / (1) 12 inch bass driver
Tweeter	AMT160 ("Black Rhino" AMTHorn®) Tweeter H x V 100° x 70° With DuPont Kapton film vibration-damping swivel system Super Low Distortion, High SPL out
Midbass	6.5 Inches High-strength cellulose fiber cone impregnated and coated on both sides with damped resins, fitted with fabric dome, high-speed flat, damped surround and acoustically damped rear cavity High-temperature stabilized Copper Clad Aluminum Flat Wire(CCAR)
Bass driver	12 Inches High-strength cellulose fiber cone impregnated and coated on both sides with damped resins High-temperature stabilized Copper Clad Aluminium Wire(CCAW)
Cabinet Structure	Ported
Input terminals	Neutrik speakON input (2 pole, ++1) / S-LINK Banana input
Crossover	3 way
Crossover points	490Hz / 3500 Hz
Grille	Cloth Grille on wood frame
Finish	Textured finish & Aluminum
Color options	Black
Full size	H 989 x W 450 x D 280mm (with Black Rhino AMTHorn) H 770 x W 450 x D 280mm (w/o Black Rhino AMTHorn)
Weight	79.4 lbs (36kg) / each
Shipping size	L 22.8 x W 16 x H 43.2 inches / L 578 x W 408 x H 1097 mm
Shipping weight	94.4 lbs (42.8kg) / each
Warranty	5 years (from original purchase date)