



VS61 MKII

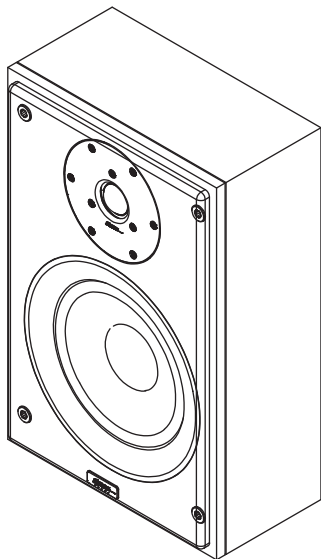

Perfect multi-channel speaker

The depth of VS61 is deceptively thin coming less than 5 inches. Even with this depth we were able to lower the bass extension to an amazing 45hz! With the VS61 you can use 5 or more speakers to create a true multi-channel experience.

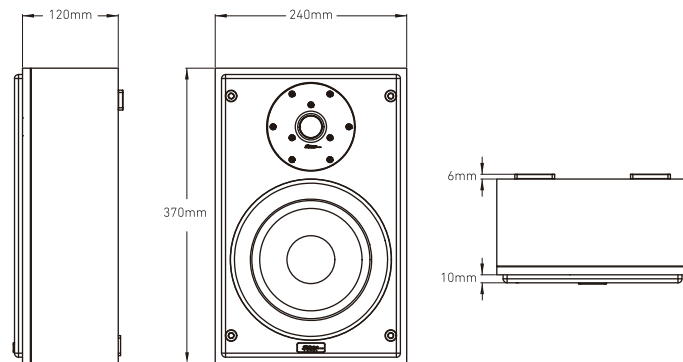

STARKE
S O U N D

Technical Specifications

Max SPL output (1m)	107dB
Frequency response (~3dB)	60Hz-25KHz
Recommended amplifier power	25-200w
Nominal impedance	4 ohms
Sensitivity (2.83v at 1m)	86dB
Drivers	1.1 inch 6.5 inch
Tweeter	soft dome, 1.1 inch (28mm) Voice coil
Bass driver	6.5 inch Metal Ceramic Drivers with HEMF technology
Cabinet Structure	Sealed
Input terminals	Binding posts (Press type) Bare wire supported
Crossover	2 way
Crossover points	3200Hz
Grille	Yes
Finish	Matt wiredrawing & Sub-gloss varnish
Color options	Black
Rough opening	370 x 240mm
Depth behind surface finish	130mm
Full size	L 14.6 x W 9.4 x H 5.1 inches (Grille depth included) H 370 x W 240 x D 130 mm (Grille depth included)

Weight	12.8 lbs(5.8kg) / each
Shipping size	L 13 x W 8.8 x H 17.4 inches L 329 x W 223 x H 441 mm
Shipping weight	14.3 lbs(6.5kg) / each
Warranty	5 years (from original purchase date)

If Service Seems Necessary Contact the dealer from whom you purchased the speaker system. If that is not possible, email us at.

E-mail:service@starkesound.com
or write to:
STARKE SOUND, INC. California, USA
17810 S.Main St., Suite B, Gardena, CA 90248