



VS62 MKII

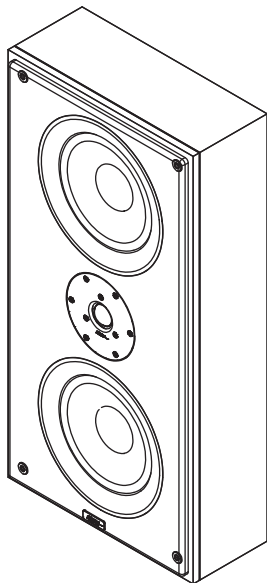

STARKE
S O U N D

Sleek and Robust

In today's modern living room space is a valuable commodity. Efficient cabinet design shouldn't have to compromise on performance, so our engineers developed the VS62. Our objective was to deliver huge dynamics from a slim, on-wall cabinet that can be easily installed in any family room or home theater. How is this achieved? We have engineered a robust 6.5-inch metal ceramic driver array into a ported cabinet slim enough not to intrude on your living space. You can now transform your family room into a professional home theater in no time at all.

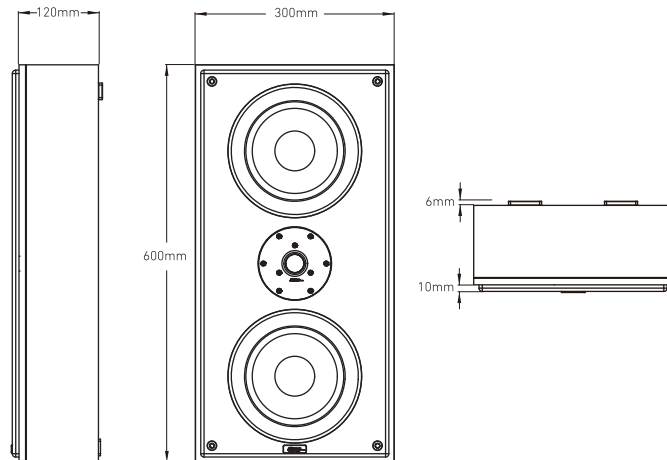

Technical Specifications

Max SPL output (1m)	112dB
Frequency response (-3dB)	50Hz-25KHz
Recommended amplifier power	35-300w
Nominal impedance	4 ohms
Sensitivity (2.83v at 1m)	89dB
Drivers	1.1 inch (2) 6.5 inch
Tweeter	soft dome, 1.1 inch (28mm) Voice coil
Bass driver	(2)6.5 inch Metal Ceramic Drivers with HEMF technology
Cabinet Structure	Sealed
Input terminals	Binding posts (Press type) Bare wire supported
Crossover	2 way
Crossover points	3200Hz
Grille	Yes
Finish	Matt wiredrawing & Sub-gloss varnish
Color options	Black
Rough opening	600 x 300mm
Depth behind surface finish	130mm
Full size	H 23.6 x W 11.8 x D 5.1 inches (Grille depth included) H 600 x W 300 x D 130 mm (Grille depth included)

Weight	22.7 lbs(10.3kg) / each
Shipping size	L 15.4 x W 8.8 x H 26.4 inches L 390 x W 224 x H 670 mm
Shipping weight	25.4 lbs(11.5kg) / each
Warranty	5 years (from original purchase date)

If Service Seems Necessary Contact the dealer from whom you purchased the speaker system. If that is not possible, email us at.

E-mail:service@starkesound.com
or write to:
STARKE SOUND, INC. California, USA
17810 S.Main St., Suite B, Gardena, CA 90248