


Pitt&Giblin



FLARE LOUDSPEAKER SPECIFICATIONS

TYPE:	TWO-WAY BASS REFLEX ACTIVE LOUDSPEAKER
LF DRIVERS:	8" PAPER CONE NEODYMIUM WOOFER
HF DRIVER:	1" POLYMER DOME COMPRESSION DRIVER
CABINET:	AA GRADE VOID-FREE BIRCH PLYWOOD, WITH SPECIALTY VENEERS
WAVEGUIDE:	CONSTANT DIRECTIVITY, SOLID CAST BRONZE
DSP: / AMPLIFIER:	Pascal IP125.4 (500W total, 250w per biamp loudspeaker)
AMPLIFIER POWER:	LF 250W, HF 250W, 250W Power supply shared.
MAINS POWER:	INTERNATIONAL
MAXIMUM SPL:	TBC
FREQUENCY RESPONSE:	36-25,000 Hz, ± 1.5 dB
BASS EXTENSION:	36 Hz @ -3dB, 28Hz @ -10 dB, half space.
CROSSOVER:	900 Hz

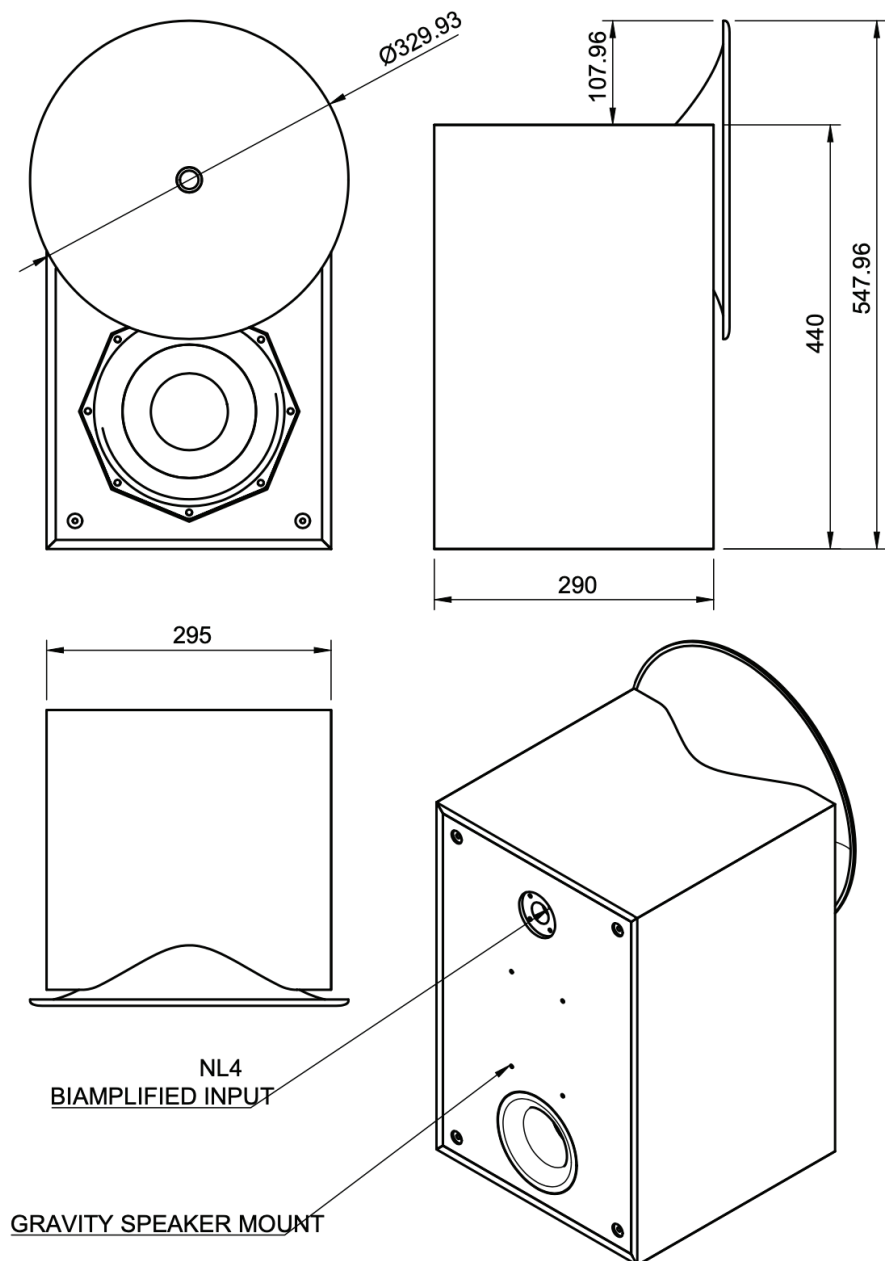